

ESC8000-E12P

New Generation, High Performance 4U NVIDIA MGX™ Server



4U



2



32

ESC8000-E12P is a dual-socket server powered by Intel® Xeon® 6 processors, designed for enterprise AI infrastructure with exceptional computational capabilities, accelerating GPU interconnects and high-bandwidth fabric, supporting up to eight 600W dual-slot GPUs, and offering scalable performance through configurable NVIDIA® NVLink™ 2-Way or 4-Way Bridges to optimize bandwidth and performance for demanding AI and HPC workloads.

FEATURE

- Intel® Xeon® 6 Processors
- Modularized Design
- Support 8 x 600W dual-slot GPU
- Optimized Server Configuration
- Toolless Design

Intel® Xeon® 6 Processors

Powered by Intel® Xeon® 6 Processors featuring 86 cores, eight-channel DDR5 memory up to 6400MHz and a maximum TDP of 350 watts per socket.

Modularized Design

Fully compliant with NVIDIA MGX™ architecture, it can enable multiple configurations and rapidly deploy in large-scale enterprise AI infrastructures.

GPU and NVIDIA® NVLink™ bridge Support

Support up to eight dual-slot 600W GPUs, NVIDIA® NVLink™ 2-Way or 4-Way bridges, and NVIDIA BlueField®-3 DPUs to enable performance scaling.

Optimized Server Configuration


Based on the NVIDIA OVX™ system, the server is configured with a 2-8-5 topology (CPU-GPU-DPU/NIC). Five high-bandwidth PCIe NICs and DPUs enhance network traffic and system performance.

Toolless Design

The ASUS-exclusive toolless design empowers easy service and saves over 90% maintenance time for maximum efficiency.

Target market

- Virtual Machines
- Data Center
- HPC Application
- AI Training
- LLM Inference

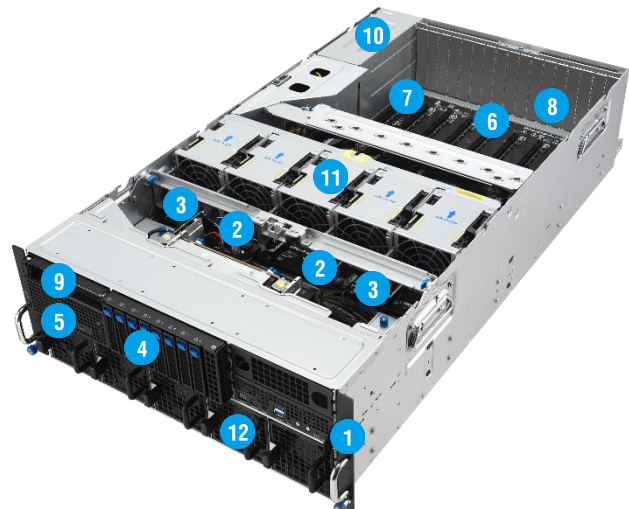

1. Asset Tag
2. 32 x DDR5 DIMM up to 6400Mhz
3. 2 x Intel® Xeon® 6 Processors
4. 8 x 2.5" Hot-swap HDD Bays
5. 2 x M.2 (Gen 5 x4 link, up to 22110)
6. 8 x PCIe slot for dual-slot GPU (Gen5 x16 link, support up 600W)
7. 1 x PCIe slot for NIC (Gen5, x16 link, FHHL)
8. 4 x PCIe slot for NIC/ NVIDIA BlueField®-3 DPUs (Gen5, x16 link, FHHL)
9. 1 x PCIe slot for PCIe card (Gen5 x8 link, FHHL)
10. 3+1 Redundant 3200W 80 PLUS Titanium Power Supply
11. 5 x 8080 Tool-less, Hot-Swap GPU Fan Modules
12. 5 x 8080 Tool-less, Hot-Swap System Fan Modules

ESC8000-E12P

SPECIFICATION

Processor Support		2 x LGA 4710 sockets Intel® Xeon® 6500/6700 processors Up to 350 TDP
Core Logic		System on Chip (SOC)
Memory	Total Slots	32 x DIMM slots (8 channel per CPU, 16 DIMM per CPU)
	Capacity Memory Type	Maximum up to 4TB DDR5 6400 (1DPC) / 5200 (2DPC) RDIMM *Refer to ASUS server AVL for the latest update
	Memory Size	128GB, 96GB, 64GB, 32GB RDIMM *Refer to ASUS server AVL for the latest update
Expansion Slots	Total Slots	14
	Slot Type	-8 x PCIe x 16 for dual-slot GPU cards (Gen5 x 16 link, FHFL) -5 x PCIe x 16 for NIC/ BlueField-3 cards (Gen5 x 16 link, FHFL) -1 x PCIe x 16 (Gen5 x 8 link, FHHL)
Storage Bays		8 x 2.5" Front Hot-swap Storage Bays (Backplane supports up to 8 x NVMe)
Networking		2 x M.2 socket (Gen 5 x4 link, up to 22110)
	LAN	2 x 10GbE LAN ports (RJ45, X710-AT2) 1 x Management Port (RJ45)
Graphic	VGA	Aspeed AST2600 64MB
Front I/O Ports		1 x Mini DisplayPort 2 x USB 5Gbps ports 1 x Debug port
Rear I/O Ports		1 x USB 5Gbps port 2 x RJ-45 LAN ports 1 x RJ-45 management LAN port
Switch/LED		Front: 1 x Power switch/LED, 1 x Location switch/LED, 1 x Message LED, 1 x Clear CMOS switch, 1 x Reset switch, 2 x M.2 LEDs, 2 x LAN LEDs, 1 x Q-Code/Port 80 LED Rear: 1 x Power switch/LED, 1 x Location switch/LED, 1 x Message LED
OS Support		Windows® Server, RedHat® Enterprise Linux, SuSE® Linux Enterprise Server, CentOS, Ubuntu, VMware Please find the latest OS support from OS Compatibility Guide ASUS
Management Solution	Software	ASUS Control Center (Classic)
	Out of Band Remote Management	On-Board ASMB12-iKVM for KVM-over-IP
Dimension		800mm x 439.5mm x 175 mm (4U) 31.5"x17.3"x 6.9"
Net Weight Kg (CPU, DRAM & HDD not included)		42 kg
Gross Weight Kg (CPU, DRAM & HDD not included, Packing include)		44.23 kg
Power Supply (following different configuration by region)		3+1 Redundant 3200W 80 PLUS Titanium power Rating: 220-240 Vac, 16A (x4) 50/60Hz
Environment		Operating temperature: 10°C ~ 35°C* Non-operating temperature: -40°C ~ 60°C Non-operating humidity: 20% ~ 95% (Non-condensing) *For operating temperatures above 30°C, please contact your local sales representative